



HT48-18X(N)

SINGLE GLASS TOPCON PV MODULE

440-460W

DESIGNED FOR AUSTRALIA

MODULE EFFICIENCY UP TO 23.0%

FEATURE



Half-cut cell technology reduces internal power loss, improves power production and provides excellent heat dissipation to avoid hot spots.



30 Year product warranty for rooftop installations
15 Year for ground mounted.



30 Year power output warranty.

EL Tested

High quality control using double EL tests to ensure reliability and avoid microcracks.



Certified to withstand extreme mechanical load 5400 Pa positive and 2400 Pa negative. 25mm hailstone at the speed of 23m/s.

TOPCon

Optimised Multi-Busbar (MBB) for maximum light absorption, lower resistance and improved current collection for enhanced reliability.



Designed for high voltage systems of up to 1500 VDC, increases string length and saves on BoS costs.



All modules sorted and packaged by amperage reducing mismatch losses by average of 2% to enhance system output.


AntiPID

Excellent Anti-PID performance resulting in low power degradation and a high energy yield.

Low Degradation Rate

0.4% annual degradation rate over 30 year power output.

WARRANTY

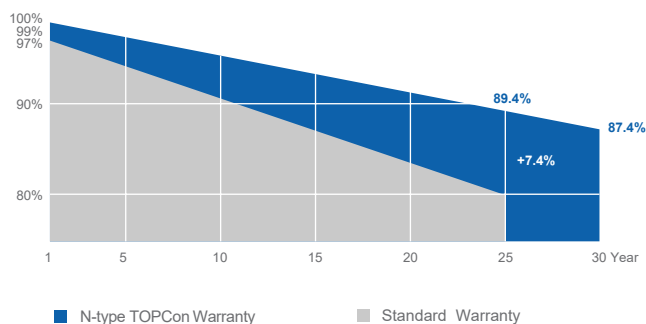

COMPREHENSIVE AND FIRST-RATE CERTIFICATION SYSTEM

IEC 61215, IEC 61730 Latest Standard

ISO 9001, ISO 14001, ISO 45001 and SA8000.

Strict quality control of the highest international standards.



440W / 445W / 450W / 455W / 460W